


SonoFiber™ Natural Fiber Based Acoustical Panels

Benefits:

- Economical Class A offering satisfies strict code requirements
- Tough for harsher installation environments
- Charcoal Gray blends into many settings and is appropriate where aesthetics is a consideration, but not of primary importance
- Acoustical performance equal to or better than other Class A offerings
- Panels can be stacked to improve low frequency absorption
- No dust-out, itching or skin irritation commonly associated with fiberglass panels
- 2' x 2's allow for easy installation and decorative patterns

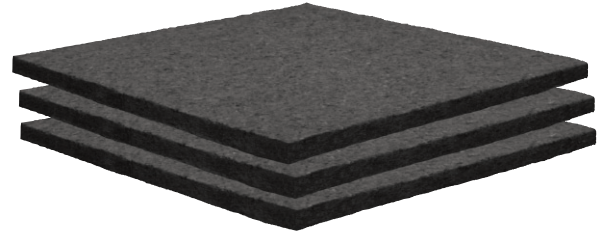

Applications:

- Nightclubs
- Soundstages
- Restaurants
- Studio Live Rooms
- Gymnasiums
- Commercial facilities
- Multi-purpose Rooms
- Industrial facilities

Size:

- 2' wide x 2' tall x 1" thick

Box Information:

- (24) 2' x 2' x 1" thick (96 sq. ft. per box)
- Box size of 48.5" x 24.5" x 16"

Installation:

- Adhesives:
 - 1 Foamtak per box, or
 - 3 Tubetak Pro per box
- Other:
 - TEMP•Tabs Mounting Panel Kit
 - Mechanical fasteners (e.g., T-pins, tacks, nails, etc.)

Colors:

- Charcoal Gray only

Specifications:

- Passes Corrosion/Fungi/Odor Emission test ASTM C739
- Flame Spread Index: 10 Class A ASTM E 84
- Smoke Developed Index: 20 Class A UL 723

Overall NRC:

- 0.75

Absorption Test Data (Absorption Coefficient):					
125Hz	250Hz	500Hz	1kHz	2kHz	4kHz
0.09	0.20	0.72	0.97	1.04	1.01

Absorption Products