

## SonoColumns™ Broadband Control Treatment

### Benefits:

- Made from Auralex's proprietary Studiofoam®
- Can have either fluted or flat face depending on orientation
- Flexible placement options; can be used as a wall column or corner bass trap
- 6" thickness provides exceptional low-frequency control
- Columns are 4' long to fit within standard ceiling heights
- Won't crumble with age
- Class B flame retardancy
- Pass California fire code #117



### Applications:

- Use to treat areas where a non-flat surfaced foam will detract from the overall appearance of the room
- Great for just about any low to mid frequency application

### Size:


- 12" wide x 6" deep x 4' long columns

### Box Information:

- (4) SonoColumns per box
- Box size of 48.5" x 24.5" x 16"

### Colors:

- Charcoal Gray only

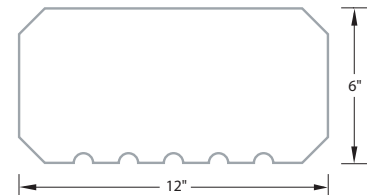

### Installation:

- |                       |   |
|-----------------------|---|
| • Adhesives:          | • Other:  |
| 1 Foamtak per box, or | TEMP•Tabs Mounting Panel Kit                            |
| 2 Tubetak Pro per box | Mechanical fasteners (e.g., T-pins, tacks, nails, etc.) |

### Accessory Products:

- |                          |                      |
|--------------------------|----------------------|
| • Foamtak Adhesive       | • 2" SonoFlat Panels |
| • Tubetak Pro Adhesive   | • SonoCollars        |
| • TEMP•Tabs Mounting Kit |                      |

### Overall NRC:

- 1.40

Absorption Test Data (Absorption Coefficient):					
125Hz	250Hz	500Hz	1kHz	2kHz	4kHz
1.10	1.36	1.50	1.38	1.34	1.33

Absorption Products